


NICOR LED PRODUCT REFERENCE GUIDE

Visit nicorlighting.com for more information

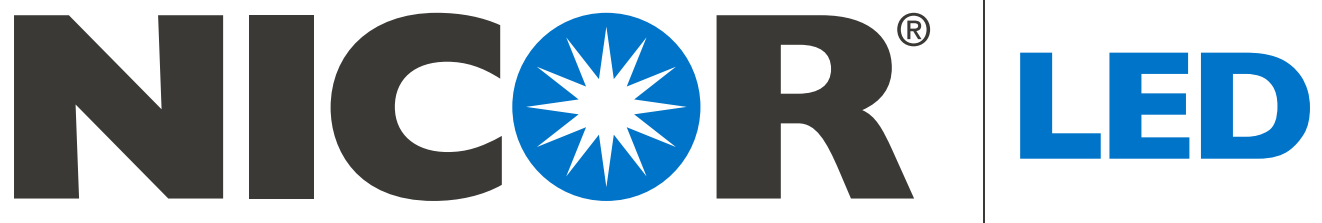

A Quick Reference Guide

DOWNLIGHTING

NICOR LED PRODUCT REFERENCE GUIDE

Visit nicorlighting.com for more information

DOWNLIGHTING

CLR

COMMERCIAL RECESSED



Lm	W	Lm/W
1025	10	98-106
1756	17	100-108
2325	26	87-93

CCT
2.7K 3K & 3.5K 4K 5K

FINISH	TRIM
White 6" 8"	Black, Aged Copper, Nickel

DCR

RESIDENTIAL RECESSED



Lm	W	Lm/W
640	8	77-83
850	11	81-88
1200	15	83-89

CCT
2.7K 3K 4K 5K

FINISH	TRIM
White, White Baffle 4" 5/6"	Black, Aged Copper, Nickel

DGD

REMOTE DRIVER GIMBAL



Lm	W	Lm/W
360	5	74
570	8	72
980	12	85

CCT
2.7K 3K 4K 5K

FINISH OPTIONS
White, Black, Aged Copper, Nickel 2" 3" 4"

DLE SELECT

CCT SELECTABLE
EDGE LIT RECESSED



Lm	W	Lm/W
655	10	65-73
710	11	65-70

CCT
3K 4K 5K

FINISH	TRIM
White 4" 6"	Black, Oil-Rubbed Bronze, Nickel

SUREFIT™ v2

DLFv2 - 4" ULTRA SLIM
SURFACE MOUNT DOWNLIGHT



Lm	W	Lm/W
670	11	64-69

CCT
2.7K 3K 4K 5K

FINISH	TRIM
White 4"	Black, Oil-Rubbed Bronze, Nickel

DLRv5

RECESSED LED
DOWNLIGHT SYSTEM



Lm	W	Lm/W
750	9	82-87
920	12	75-81
1380	17	80-85

CCT
2.7K 3K 4K 5K

FINISH	TRIM
White, White Baffle* 4" 5/6"	Black, Oil-Rubbed Bronze, Nickel

DQR4MA

4" MULTI-ADJUSTABLE
RECESSED LED DOWNLIGHT



Lm	W	Lm/W
670	9	75-81

CCT
2.7K 3K 4K 5K

FINISH
White 4"

DRD/DQD

REMOTE DRIVER 2"



Lm	W	Lm/W
580	8	70-75
630	8	77-83

CCT
2.7K 3K 4K 5K

FINISH	SHAPE
White 2"	2" Round 2" Square

DSE

EDGE LIT SURFACE MOUNT



Lm	W	Lm/W
610	10	61-66
950	13	71-76
1280	19	67-73
610	10	61-66
920	13	69-74
920	13	69-74

CCT
2.7K 3K 4K 5K

FINISH	SHAPE
White	5" 8" 9" Round 4" 6" 9" Square

DOWNLIGHTING & HIGH/LOW BAY

DSK SELECT

CCT SELECTABLE
DRIVERLESS SURFACE MOUNT



Lm	W	Lm/W
660	9	72-79
810	13	67-74

CCT
3K 4K 5K

FINISH
White 4" 6"

DDA

DDA SPECIFICATION
GRADE DOWNLIGHT



Max Lm	W	Max Lm/W
1500	15	95-100
2200	21	80-100

CCT
2.7K 3K & 3.5K 4K 5K

HOUSING
ADJ, Remodel, New Construct

LOCATION	TRIM SHAPE
Wet / Damp Location	Round, Square

TRIM COLOR	STYLE
White, Black, Specular Clear	Smooth, Baffle

QUIET CEILING	CRI
Round, Square, None	80, 90

OPTIC
Beam Patterns

APPLICATIONS
Residential Homes, Exterior, Hospitality, Retail and Malls



CDA

CDA SPECIFICATION
GRADE DOWNLIGHT



Max Lm	W	Max Lm/W
1900	16	115
2800	25	115
4370	38	115
5650	50	115
7200	70	115
9300	100	115

CCT
2.7K 3K & 3.5K 4K 5K

HOUSING
ICAT, Remodel, Architectural, New Construction

SIZES	TRIM COLOR
4", 6", 8", 10"	White, Black, Specular Clear, Haze, Champagne, Wheat

FLANGE COLOR	QUIET CEILING
White, Self, Flangeless, Custom	Round, None

CRI	OPTIC
80, 90	Beam Patterns

APPLICATIONS
Office Buildings, Commercial Spaces, Institutional, Health Care



HIGH/LOW BAY

HBL3

LINEAR



Lm	W	Lm/W
14390	110	108
21130	162	100-108
28620	223	87-93
42120	321	132-135

CCT
4K 5K

FINISH	SIZES
White 4" Height	A 110W/162W: 23.8"x12.6"

HBC3

ROUND



Lm	W	Lm/W
14190	101	141-151
21734	155	143-151
28787	201	143-151

CCT
4K 5K

FINISH	SIZES
Black 4" Height	A 100W: 8.9"x6"

Contact your agent for more information

All lumens, wattages, and Lm/W are close approximations and typically lowest CCT. For the most up to date information, see product spec sheets, available online!

MIXED

NICOR LED PRODUCT REFERENCE GUIDE

Visit nicorlighting.com for more information

LINEARS AND WRAPS


LSC SELECT

CCT & WATTS SELECTABLE
LINEAR STRIP



	Lm	W	Lm/W
②	2530	20	133-144
③	3300	22	141-161
④	4140	28	141-156
⑤	5130	40	133-147
⑥	8080	65	135-150

CCT



FINISH
White | 2' 4' 8'



SENSOR
Motion sensor or None

WPC

LED LINEAR WRAP



	Lm	W	Lm/W
②	2190	20	110
④	2830	39	107-112

CCT



FINISH
White



UNDER CABINETS


NUC5 SELECT

CCT SELECTABLE
LED UNDER CABINET



	Lm	W	Lm/W
⑧	250	4	68-80
⑩	380	5	73-85
⑪	630	9	73-85
⑫	730	11	66-77
⑬	1040	16	67-78

SELECT CCT



FINISH & SIZE

White, Black, Oil-Rubbed Bronze, Nickel in
8" 12.5" 21.5" 30" 40"



HAZLOC HAZARDOUS LOCATIONS

ERES

XPR - AREA LIGHT



	Lm	W	Lm/W
	6430	45	152-154
	9420	65*	145-152

*not available for HO

CCT



FINISH
Gray



CLASS

C1D2 | Group: A, B, C, D
C2D1 | Group: E, F, G
C2D2 | Group: F, G
C3

See spec sheet for more information

TITAN

XPQ - FLOOD LIGHT



	Lm	W	Lm/W
	8870	74	121-126
1A	11690	98	120-125
	16580	140	119-124
	8870	74	121-126
1B	11690	98	120-125
	16580	140	119-124

CCT



FINISH
Gray



XPQ1A CLASS

C1D1 | Group: C, D
C1D2 | Group: A, B, C, D
C2D2 | Group: F, G


See spec sheet for more information

XPQ1B CLASS

C1D2 | Group: A, B, C, D
C2D1 | Group: F, G
C2D2 | Group: F, G
C3

PROTEUS

XPL - LINEAR LUMINAIRE



	Lm	W	Lm/W
	4010	38	105-116
1A	8280	81	103-113
	4010	38	105-116
1B	8280	81	103-113

CCT



FINISH
Gray | 2' 4'



XPL1A CLASS

C1D1 | Group: C, D
C1D2 | Group: A, B, C, D

See spec sheet for more information

XPL1B CLASS

C1D2 | Group: A, B, C, D
C2D1 | Group: E, F, G
C2D2 | Group: F, G
C3

OUTDOOR & SPECIALTY

OUTDOOR

AQUILAv2

OALv2 - AREA LIGHT



Lm	W	Lm/W
37900	300	127-133

CCT



FINISH
White, Bronze



OPTIC
Type III, Type V

SENSOR
PC, R, M, D, E:

*PC - Photocell, R - Receptacle & Shunt,
M - Motion Sensor, D - PC & M, E: M & R



ARA

OFL - FLOODLIGHT



Lm	W	Lm/W
1480	15	126
5560	50	118
8580	75	123
11600	90	126

CCT



FINISH
Bronze, Dusty Gray



MOUNTING
Knuckle Included



CORVUS

OWG - WALLPACK



Lm	W	Lm/W
5850	50	122-124
9800	80	125-127
14210	120	122-124

CCT



FINISH
White, Bronze



SENSOR
Photocell, None



CYGNUS

OWF - WALLPACK



Lm	W	Lm/W
5660	50	122-125
8790	80	110-115

CCT



FINISH
White, Bronze



SENSOR
Photocell, None



OBELUS

OWR - WALLPACK



Lm	W	Lm/W
2950	30	106-108

CCT



FINISH
White, Bronze



SENSOR
Photocell Included



VELA

OUC - CANOPY



Lm	W	Lm/W
4950	45	111
9550	80	120

CCT



FINISH
White, Bronze



SENSOR
Photocell, Motion Sensor, None



SPECIALTY

PRIMECHIME+

ELECTRIC DOOR CHIME



WATTAGES	CCT
N/A	N/A

FINISH
White with standard white



BELL

PRCP1DB - White, Black, BR Copper, BR Nickel
PRCP15B - White, BP Brass, Nickel, AQ Brass, ARC Bronze



BUTTON

Rectangular Deco PRCP1D | Round Stucco PRCP15B



STW

STEP LIGHT WET LOCATION



WATTAGES	CCT
3W (Vrt) 5.4W (Horz)	3K

CCT



FINISH
White, Black, Bronze



SHAPE
Vertical STW | Horizontal STW



STP / STP-PC

STEP LIGHT



WATTAGES	CCT
1W	2.7K

CCT



FINISH
White, Black, Oil-Rubbed Bronze



SHAPE
Vertical STP | Horizontal STP



SENSOR
Photocell (STP-PC), None



Contact your agent for more information

All lumens, wattages, and Lm/W are close approximations and typically lowest CCT. For the most up to date information, see product spec sheets, available online!

NICOR LED PRODUCT REFERENCE GUIDE

EMERGENCY

ECL1
LED COMBO



WATTAGES 2.4W	TOP 3 FEATURES Damp Location 90 Min Capacity Universal Mounting
-------------------------	---

LETTER Green, Red	REMOTE With, Without Remote	REMOTE HEADS ERL 1 2 ERL 3 4 (WL)
-----------------------------	---------------------------------------	---

ECL2
SLIM LED COMBO



WATTAGES 3.3W	TOP 3 FEATURES 1" Slim Housing Damp Location 90 Min Capacity
-------------------------	--

LETTER Green, Red	FACES Single and Double
-----------------------------	-----------------------------------

ECL5
LED COMBO



WATTAGES 3.8W (Red) 3.5W (Green)	TOP 3 FEATURES Wet Location 90 Min Capacity Universal Mounting
---	--

LETTER Green, Red	SIDES Single and Double
-----------------------------	-----------------------------------

EXL220
LED EDGE LIT EXIT SIGN V2



WATTAGES 2.3W	TOP 3 FEATURES Aluminum Housing Easy Installation 90 Min Capacity
-------------------------	---

FINISH Clear, Mirrored	LETTER Green, Red	FACES 1 Side, 2 Sides
----------------------------------	-----------------------------	---------------------------------

EXL4
SLIM LED EXIT SIGN



WATTAGES 1.6W	TOP 3 FEATURES 1" Slim Housing 90 Min Capacity Damp Location
-------------------------	--

LETTER Green, Red	FACES Single and Double
-----------------------------	-----------------------------------

EXL5
LED EXIT SIGN



WATTAGES 3.6W (Red) 3.5W (Green)	TOP 3 FEATURES Wet Location 90 Min Capacity Universal Mounting
---	--

LETTER Green, Red	SIDES Single and Double
-----------------------------	-----------------------------------

EML6
LED EMERGENCY LIGHT



WATTAGES 2.4W	TOP 3 FEATURES Wet Location 90 Min Capacity Two Swivel Heads
-------------------------	--

FINISH White

EOT
LED EMERGENCY OUTDOOR
TEAR DROP LIGHT



Lm W Lm/W 1074 13 80 (AC Version)	CCT 2.7K	5K
--	--------------------	----

FINISH White, Black, OB, Silver	SENSOR Motion Sensor, None	ADDITIONAL Test, Cold Weather, non-EM, none *See spec sheet
---	--------------------------------------	--

EOF
LED EMERGENCY OUTDOOR
FULL CUTOFF LIGHT



Lm W Lm/W 1555 17 92 (AC Version)	CCT 2.7K	5K
--	--------------------	----

FINISH White, Black, OB, Silver	SENSOR Motion Sensor, None	ADDITIONAL Test, Cold Weather, non-EM, none *See spec sheet
---	--------------------------------------	--


TROFFERS & PANELS

TAC SELECT
LED ARCHITECTURAL TROFFER



Lm	W	Lm/W
4640	34	134-144
5100	38	133-145
5990	45	130-141
2740	20	135-143
3350	25	132-140
3840	30	127-134
2710	20	135-143
3310	25	132-139
3880	30	126-138

SELECT CCT & WATTS




FINISH White	<input type="checkbox"/>
SIZE 2x4', 2x2', & 1x4'	<input type="checkbox"/>
SURFACE MT KIT SK## 2x4', 2x2', & 1x4'	<input type="checkbox"/>
DRYWALL MT KIT FK## 2x4', 2x2', & 1x4'	<input type="checkbox"/>

TAR SELECT
LED ARCHITECTURAL TROFFER
RETROFIT KIT



Lm	W	Lm/W
4630	34	138-154
5270	38	137-151
6010	45	130-143
2710	20	135-151
3350	25	133-146
3920	30	128-140
2730	20	135-152
3330	25	131-144
3910	30	126-138

SELECT CCT & WATTS




FINISH White	<input type="checkbox"/>
SIZE 2x4', 2x2', & 1x4'	<input type="checkbox"/>

TPC SELECT
LED EDGELIT PANEL




Lm	W	Lm/W
3670	30	120-121
4650	40	116-117
5510	50	111-112
2990	25	118-138
3470	30	116-135
4350	40	111-130
3170	25	125-132
3680	30	122-130
4620	40	117-124

SELECT CCT & WATTS




FINISH White	<input type="checkbox"/>
SIZE 2x4', 2x2', & 1x4'	<input type="checkbox"/>
SURFACE MT KIT TPE10SK## 2x4', 2x2', & 1x4'	<input type="checkbox"/>
FLANGE MT KIT TPE10FK## 2x4', 2x2', & 1x4'	<input type="checkbox"/>

T6C
LED TROFFER



Lm	W	Lm/W
3430	27	125-127
3430	27	125-127
4400	35	125-127
4430	35	125-127
5850	47	126-127

CCT



FINISH White Standard & High Output*	<input type="checkbox"/>
SIZE 2x4' S & HO, 2x2' S & HO, & 1x4'	<input type="checkbox"/>
SURFACE MT KIT SK## 2x4', 2x2', & 1x4'	<input type="checkbox"/>
DRYWALL MT KIT FK## 2x4', 2x2', & 1x4'	<input type="checkbox"/>

FANS
56INDWH
INDUSTRIAL



WATTAGES 60W	CCT N/A
------------------------	-------------------

FINISH OPTIONS White	<input type="checkbox"/>
--------------------------------	--------------------------

Warehouse Locations

Albuquerque, NM
Atlanta, GA
Detroit, MI
Folcroft, PA
Houston TX


Indianapolis, IN
Lombard, IL
Miami, FL
Syracuse, NY
Van Nuys, CA

T 800.821.6283

F 800.892.8393

www.nicorlighting.com

2200 Midtown Pl. NE
Albuquerque, NM 87107 USA



LIT-QRG
20200225

©2020 NICOR® • ALL RIGHTS RESERVED

NICOR® | **LED**