

NICOR® | select

Driverless Surface Mount **LED** Downlight
DSK Select



4" & 5/6"
CCT Selectable

3K 4K 5K

Selection to Fit Your Application



DSK Select

Driverless Surface Mount LED Downlight

Affordable CCT Selection with a Slim Profile

Now part of the NICOR Select line, the DSK Driverless Surface Mount LED Downlight is the thinnest installation solution that also offers the ability to adjust the CCT to 3000K, 4000K or 5000K. The ultra slim, driverless technology allows this fixture to fasten to most any 4" pancake, non-metallic or 4/O junction box eliminating the need for recessed housing. Simplify your installations using a single fixture that can be adjusted on the fly with NICOR Select.



Mounting Plate

Separate mounting plate with keyhole slots makes for quick and easy installation


Stamped Steel Body

Provides excellent heat management with a clean aesthetic



Selectable CCT

CCT Selection is directly on the back of the fixture for easy selection during installation

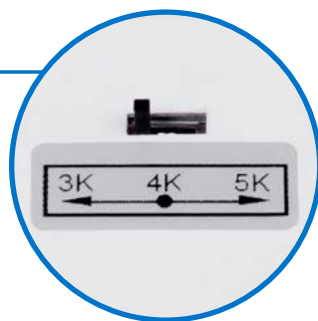

4-Step MacAdams LED

Tight LED binning for color consistency

DSK Select

Product Information

Construction

- Stamped steel body
- Fully captured diffuser
- Integrated spring lock mounting system
- Low profile micro-switch for CCT selection

Optical System

- Molded polymer, UV stabilized diffuser maximizes light output.
- Convex diffuser creates uniform light distribution while reducing glare

Electrical

- Input voltage of 120VAC, 60Hz
- Dimmable to 5% with compatible leading edge (TRIAC) and trailing edge (ELV) dimmers
- LM-79 testing performed in accordance with IESNA standards

LED

- Dual emitter array enables CCT selection
- CCT Selectable at 3000K, 4000K, or 5000K
- Binned within 4-step MacAdams with $\text{duv} < \pm 0.003$
- TM-21 Reported L70(9K) hours >54,000
- Utilizes high performing LEDs with 90+ CRI and an $R9 > 50$

Finish

- Matte white powder coat finish

Installation

- Easy installation in any 4" pancake, 4" non-metallic or 4/O junction box
- Separate mounting plate with keyhole slots for quick installation to junction boxes
- Fixture easily snaps into place on mounting plate
- Suitable for use in closets : Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5)
- Suitable for wet locations
- Operating temperature of 0° to 120°F (-18°C to 49°C)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel


Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)



Ordering Information

| Series | Version | Voltage | CCT | Trim Color |
|--------|---------|---------|-----------------------------------|------------|
| DSK4 | 3 | 120 | S (Selectable: 3000, 4000, 5000K) | WH (White) |
| DSK56 | | | | |

DSK4

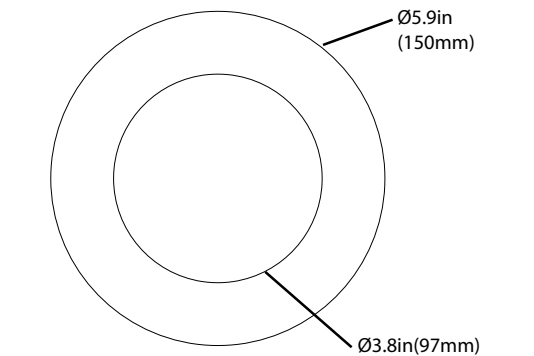

DSK56

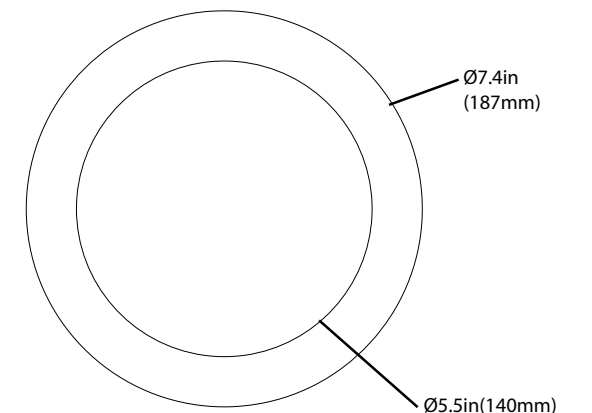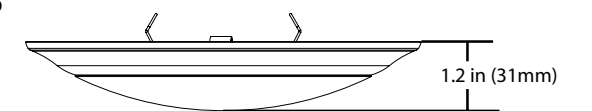

| Performance Data | | | |
|----------------------|--------|-------|-------------|
| Model Number | Lumens | Watts | Lumens/Watt |
| DSK43120SWH (3000K) | 657 | 9.1 | 72.2 |
| DSK43120SWH (4000K) | 744 | 9.4 | 79.1 |
| DSK43120SWH (5000K) | 662 | 9.0 | 73.6 |
| DSK563120SWH (3000K) | 811 | 12.1 | 67.0 |
| DSK563120SWH (4000K) | 948 | 12.9 | 73.5 |
| DSK563120SWH (5000K) | 823 | 12.2 | 67.5 |

Example: DSK563120SWH

Warehouse Locations

Albuquerque, NM
Atlanta, GA
Detroit, MI
Houston TX
Indianapolis, IN

Lombard, IL
Miami, FL
Syracuse, NY
Van Nuys, CA

T 800.821.6283

F 800.892.8393

www.nicorlighting.com

2200 Midtown Pl. NE
Albuquerque, NM 87107 USA



LIT-DSK-SELCECT
20190626

©2019 NICOR® • ALL RIGHTS RESERVED



NICOR® | select